How to change fuel filter on **Audi A4 B7 Avant** – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:
AUDI A6 C6 Saloon (4F2) 2.0 TDI, AUDI A4 B7 Saloon (8EC) 2.0 TDI, AUDI A4 B7 Saloon (8EC) 2.0 TDI 16V, AUDI A4 B7 Avant (8ED) 2.0 TDI 16V, AUDI A6 C6 Avant (4F5) 2.0 TDI, AUDI A4 B6/B7 Convertible (8H7, 8HE) 2.0 TDI, AUDI A4 B7 Saloon (8EC) 2.0 TDI quattro, AUDI A4 B7 Avant (8ED) 2.0 TDI quattro, AUDI A4 B7 Avant (8ED) 2.0 TDI

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – AUDI A4 B7 AVANT. TOOLS YOU NEED:

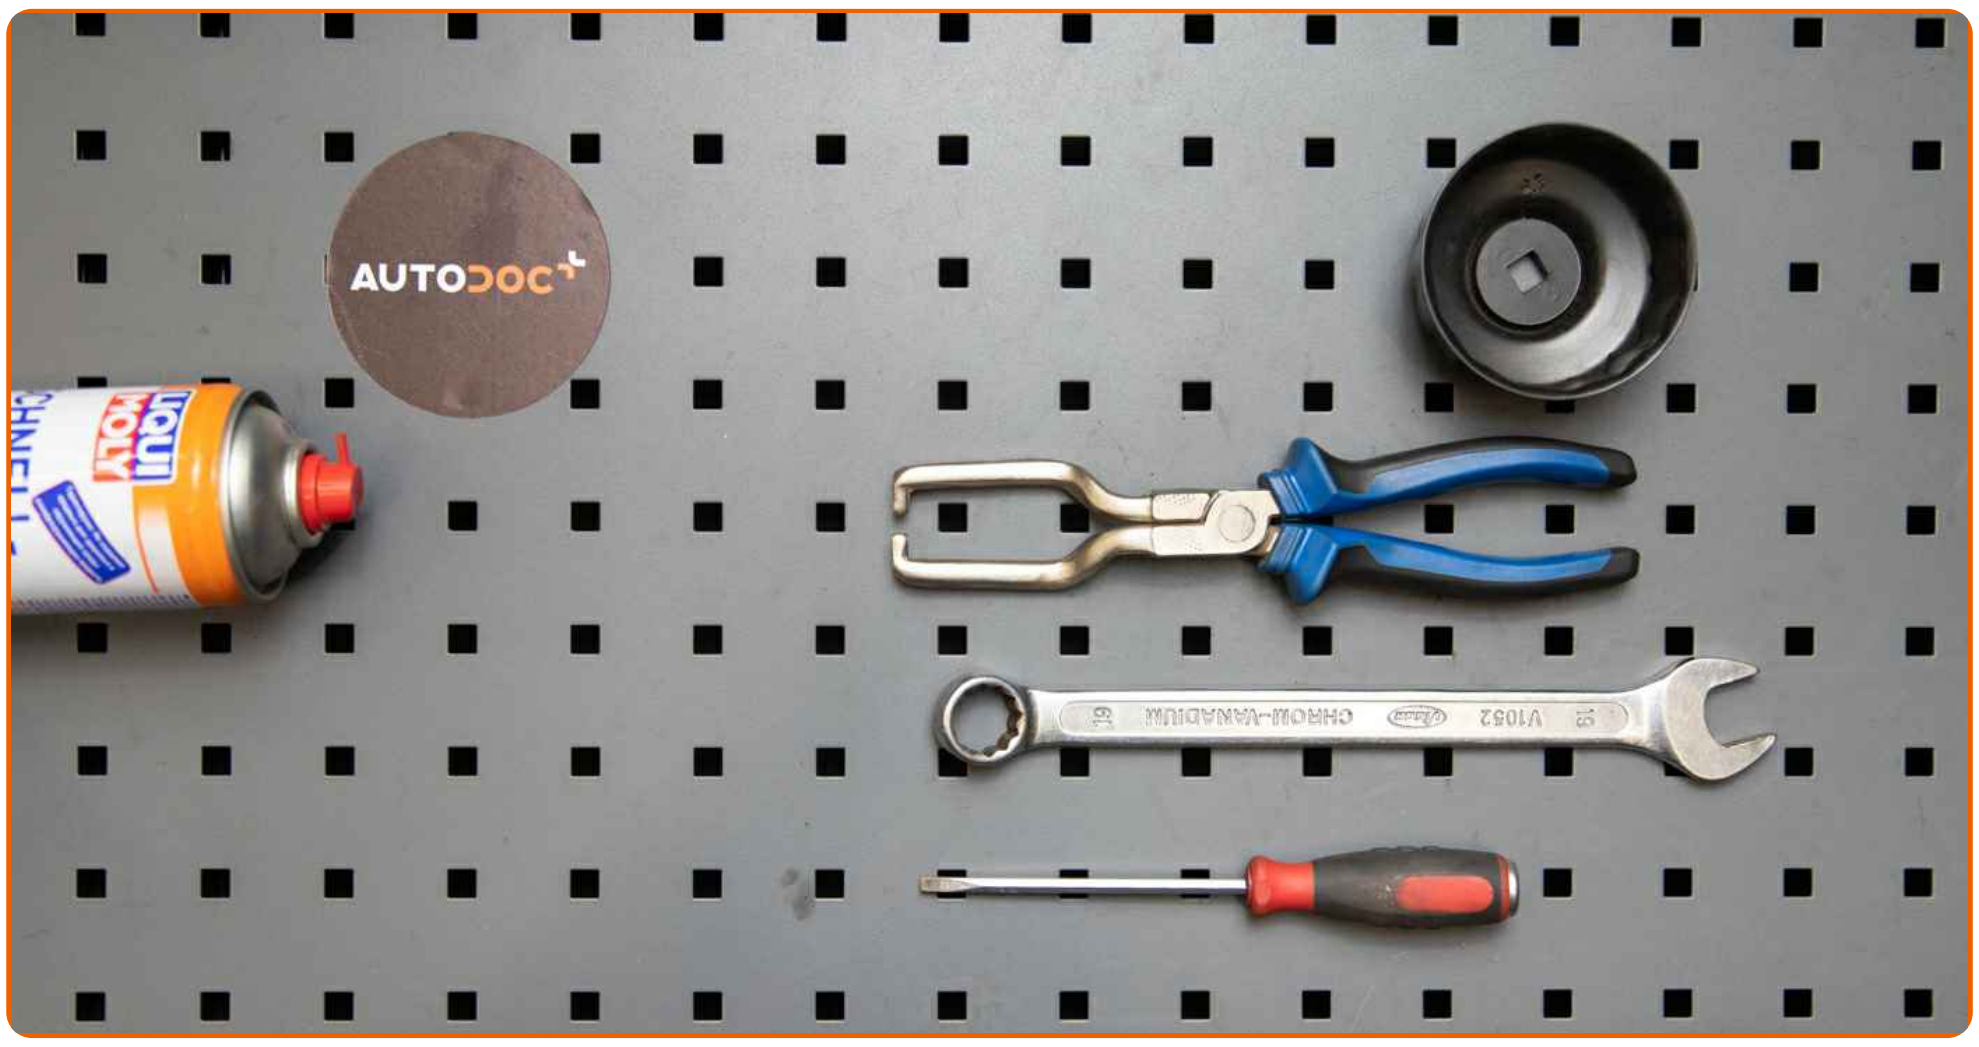

- Combination spanner #10
- Flat Screwdriver
- Pliers
- Fluid container
- Fender cover

BUY TOOLS

Replacement: fuel filter – Audi A4 B7 Avant. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – AUDI A4 B7 AVANT. RECOMMENDED SEQUENCE OF STEPS:

1 Open the bonnet.



2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3 Loosen the fuel filter mounting. Use a combination spanner #10.




4 Prepare a container for fluids.

5 Loosen the fastening clamps of the fuel filter pipes. Use pliers.




6 Detach the tubes from the fuel filter. Use a flat screwdriver.

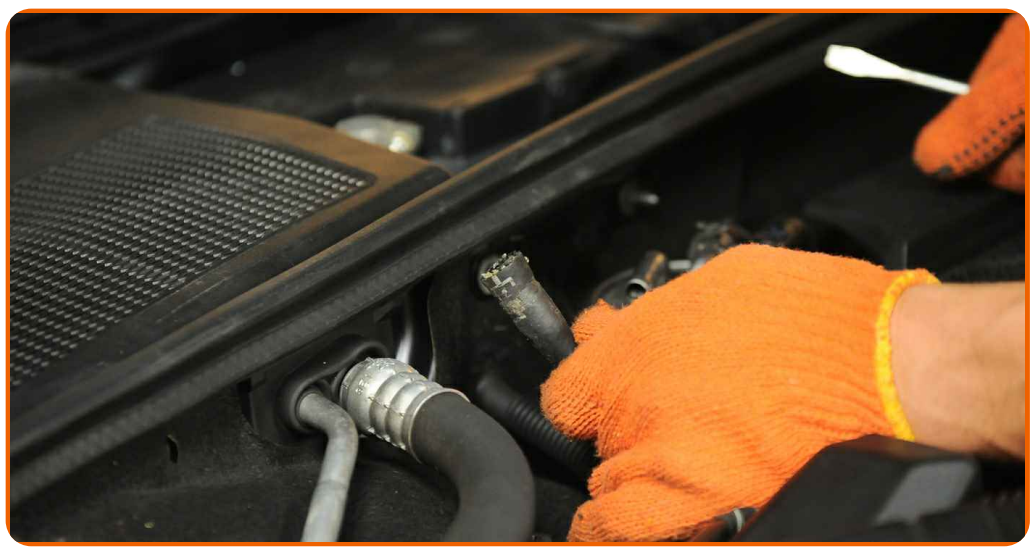

Replacement: fuel filter – Audi A4 B7 Avant. AUTODOC recommends:


- Be careful! Fuel may leak from the filter housing and hoses.

7 Remove the spring clip that holds the fuel line in place. Use a flat screwdriver.

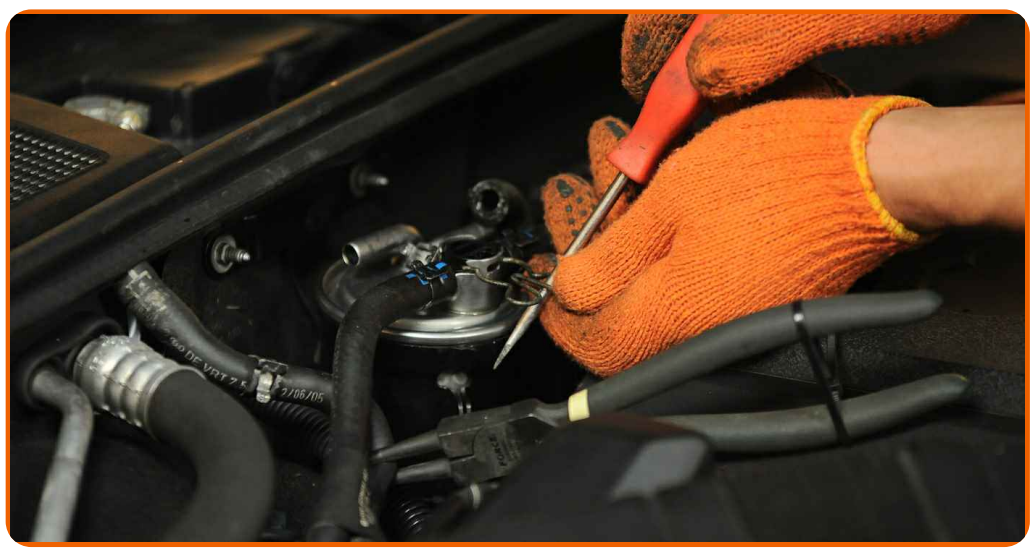

8

Disconnect the pipe from the fuel filter.

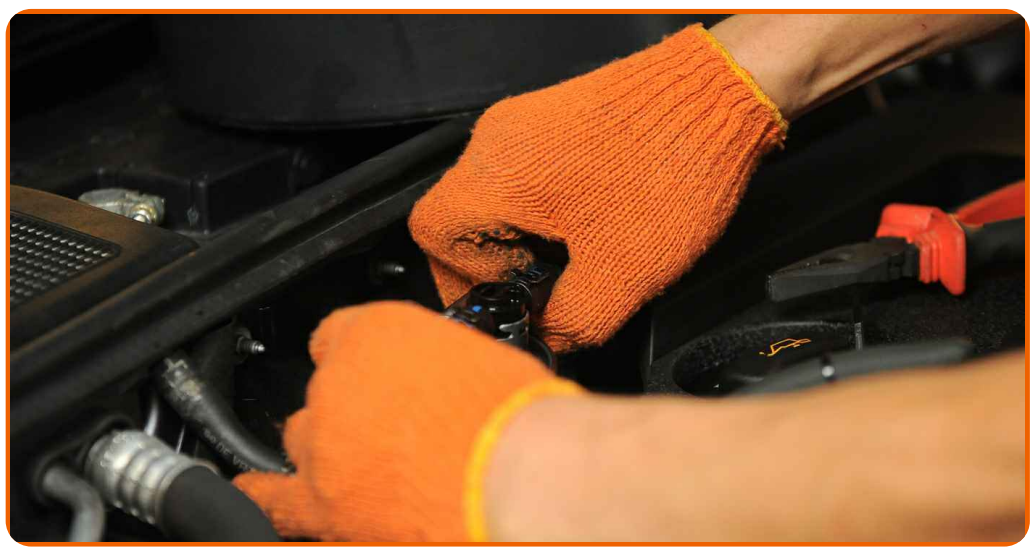

Replacement: fuel filter – Audi A4 B7 Avant. AUTODOC experts recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

9

Remove the fuel filter. Put the old filter cartridge in the container.



10

Install a new fuel filter.



Replacement: fuel filter – Audi A4 B7 Avant. Professionals recommend:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.


11 Screw in the fuel filter mounting bracket. Use a combination spanner #10.



12 Attach the tubes to the fuel filter.



13 Tighten the fastening clamps of the fuel filter pipes. Use pliers.

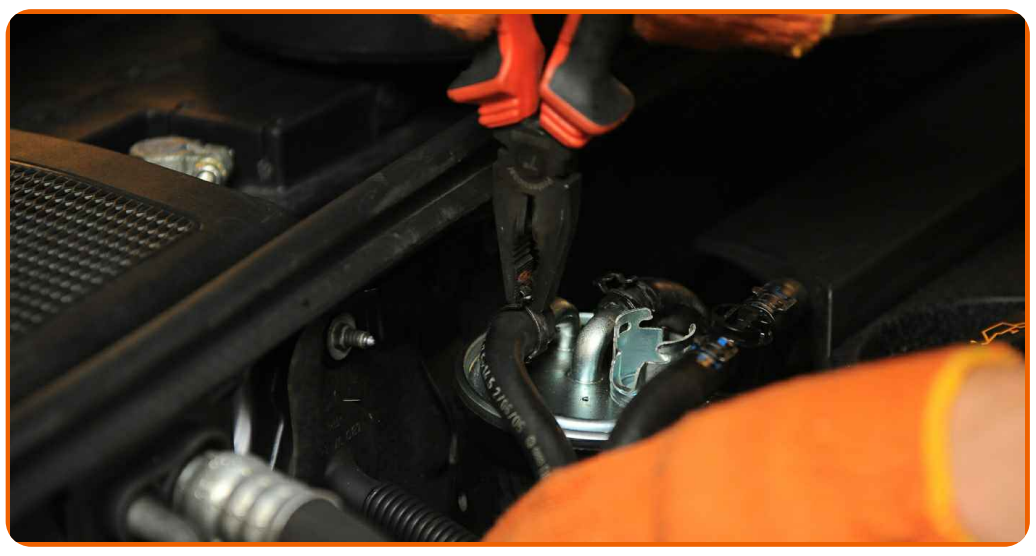

14 Attach the pipe to the fuel filter.

15 Reinstall the spring clip that holds the fuel line in place.




16 Take the fluid container away from under the fuel filter.

17 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



18 Shut off the engine.

19 Remove the fender protection cover.

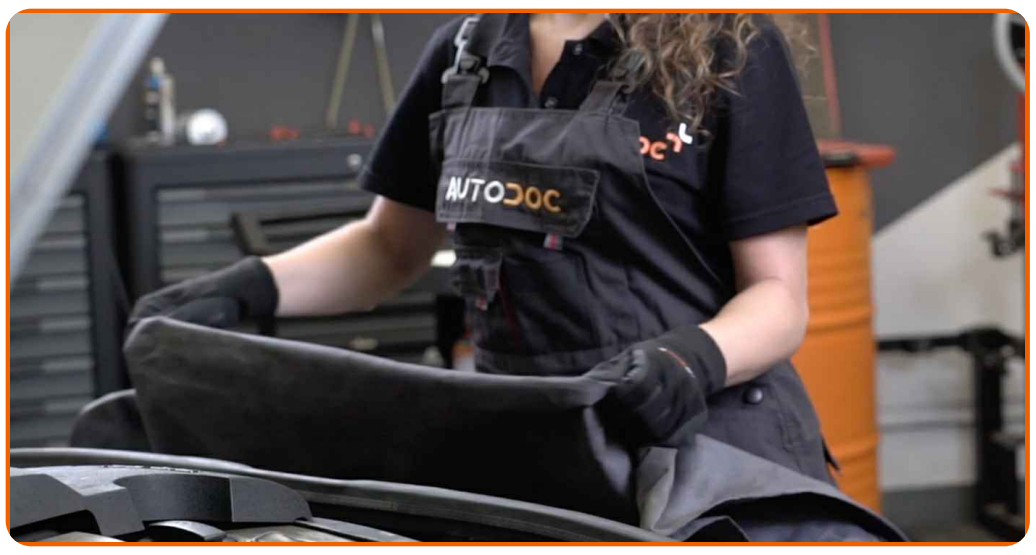

20 Close the hood.



Replacement: fuel filter – Audi A4 B7 Avant. Tip from AUTODOC experts:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR AUDI

FUEL FILTER: A WIDE SELECTION

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.